



2-wire programmable transmitter

5334A

- TC input
- High measurement accuracy
- Galvanic isolation
- Programmable sensor error value
- For DIN form B sensor head mounting



Application

- Linearized temperature measurement with TC sensor.
- Amplification of bipolar mV signals to a 4...20 mA signal, optionally linearized according to a defined linearization function.

Technical characteristics


- Within a few seconds the user can program PR5334A to measure temperatures within all TC ranges defined by the norms.
- Cold junction compensation (CJC) with a built-in temperature sensor.
- Continuous check of vital stored data for safety reasons.

Mounting / installation


- For DIN form B sensor head or DIN rail mounting with the PR fitting type 8421.

Applications

TC to 4...20 mA

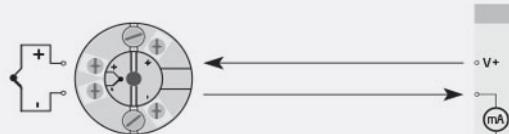

mV to 4...20 mA

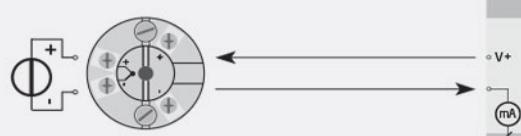

Order

Type	Version	Ambient temperature	Galvanic isolation
5334	Zone 2 / Div. 2	: A -40°C...+85°C : B	1500 VAC : B

Environmental Conditions

Operating temperature..... -40°C to +85°C
 Calibration temperature..... 20...28°C
 Relative humidity..... < 95% RH (non-cond.)
 Protection degree (encl./terminal)..... IP68 / IP00

Mechanical specifications

Dimensions..... Ø 44 x 20.2 mm
 Weight approx..... 50 g
 Wire size..... 1 x 1.5 mm² stranded wire
 Screw terminal torque..... 0.4 Nm
 Vibration..... IEC 60068-2-6
 2...25 Hz..... ±1.6 mm
 25...100 Hz..... ±4 g

Common specifications

Supply

Supply voltage..... 7.2...35 VDC
 Internal power dissipation..... 25 mW...0.8 W

Isolation voltage

Isolation voltage, test / working..... 1.5 kVAC / 50 VAC

Response time

Response time (programmable)..... 1...60 s
 Voltage drop..... 7.2 VDC
 Warm-up time..... 5 min.
 Power on to stable output..... 4.5 s
 Programming..... Loop Link
 Signal / noise ratio..... Min. 60 dB
 EEPROM error check..... < 3.5 s
 Accuracy..... Better than 0.05% of selected range
 Signal dynamics, input..... 18 bit
 Signal dynamics, output..... 16 bit
 Effect of supply voltage change..... < 0.005% of span / VDC
 EMC immunity influence..... < ±0.5% of span
 Extended EMC immunity: NAMUR NE21, A criterion, burst..... < ±1% of span

Input specifications

Common input specifications

Max. offset..... 50% of selected max. value

TC input

Thermocouple type..... B, E, J, K, L, N, R, S, T, U, W3, W5, LR
 Cold junction compensation (CJC)..... < ±1.0°C
 Sensor error detection..... Yes
 Sensor error current: When detecting / else..... Nom. 33 µA / 0 µA

Voltage input

Measurement range..... -12...150 mV
 Min. measurement range (span)..... 5 mV
 Input resistance..... 10 MΩ

Output specifications

Current output

Signal range..... 4...20 mA
 Min. signal range..... 16 mA
 Load (@ current output)..... ≤ (V_{supply} - 7.2) / 0.023 [Ω]
 Load stability..... ≤ 0.01% of span / 100 Ω
 Sensor error indication..... Programmable 3.5...23 mA
 NAMUR NE43 Upscale/Downscale..... 23 mA / 3.5 mA

Common output specifications

Updating time..... 440 ms
 of span..... = of the presently selected range

I.S. / Ex marking

ATEX.....	II 3 G Ex nA [ic] IIC T6...T4 Gc, II 3 G Ex ec [ic] IIC T6...T4 Gc, II 3 G Ex ic IIC T6...T4 Gc, II 3 D Ex ic IIIC Dc
IECEx.....	Ex nA [ic] IIC T6...T4 Gc, Ex ec [ic] IIC T6...T4 Gc, Ex ic IIC T6...T4 Gc, Ex ic IIIC Dc
INMETRO.....	Ex nA [ic] IIC T6...T4 Gc, Ex ic IIC T6...T4 Gc, Ex ic IIIC Dc

Observed authority requirements

EMC.....	2014/30/EU & UK SI 2016/1091
ATEX.....	2014/34/EU & UK SI 2016/1107
RoHS.....	2011/65/EU & UK SI 2012/3032
EAC.....	TR-CU 020/2011
EAC Ex.....	TR-CU 012/2011

Approvals

ATEX.....	DEKRA 20ATEX0096X
IECEx.....	DEK 20.0059X
INMETRO.....	DEKRA 16.0013 X
EAC Ex.....	RU C-DK.HA65.B.00355/19 DNV Marine TAA0000101